AIKO

NEOSTAR

3P54 Mono-Glass Module

485W



Technical Features:

- Partial Shading Optimisation
- Better Temperature Coefficient
- High Temperature Restriction
- Micro-crack Resistance
- Higher Power
- Lower BOS
- More Aesthetic Values
- Infinite Technology

TIER 1 BloombergNEF

ESG AWARD 2024/25 EXCELLENCE

inter solar award 2023 WINNER

reddot winner 2023

15 year Product Warranty Extendable to 25years*

30 year Performance Warranty

CE

TÜVRheinland

Warranty partner


Munich RE


Neostar 3P54


AIKO-A-MCE54Mw

485W	24.3%	≤1%	≤0.35%
Output	Efficiency	First-year Degradation	Annual Degradation from Year 2-30

30-year Linear Performance Warranty

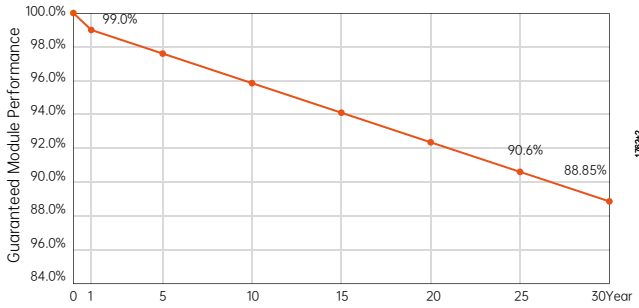





Tolerance
L: ±2mm
W: ±2mm
Unit: mm

Electrical Characteristics (STC: AM1.5 1000W/m² 25℃ NOCT: AM1.5 800W/m² 20℃ 1m/s) Power Tolerance:0~ + 3%

Module Type	AIKO-A485-MCE54Mw	
Test Conditions	STC	NOCT
P_{max} [W]	485	367
V_{oc} [V]	41.00	38.90
V_{mp} [V]	34.60	32.83
I_{sc} [A]	14.84	11.99
I_{mp} [A]	14.02	11.21
Module Efficiency	**24.3%**	

Product Specification

Cell Type	N-Type ABC
Glass	3.2mm tempered glass
Backsheet	High weather resistant backsheet
Frame	Black anodized aluminum
Cable	4mm²(IEC) 12AWG(UL) ±1200mm
No. of Cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4
Weight	20.6kg±3%
Dimension	1762*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I_{sc}	+ 0.05%/ ℃
Temperature Coefficient of V_{oc}	- 0.22%/ ℃
Temperature Coefficient of P_{max}	- 0.26%/ ℃

Installation Guide

Operation Temperature	-40℃ - +85℃
Maximum Series Fuse Rating	25A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	40 mm diameter hail at 23 m/s
Fire Rating	IEC Class C

www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice

V2.1_202502_DsDr_EN